


TORTUGA 3 Self Service

CIAM

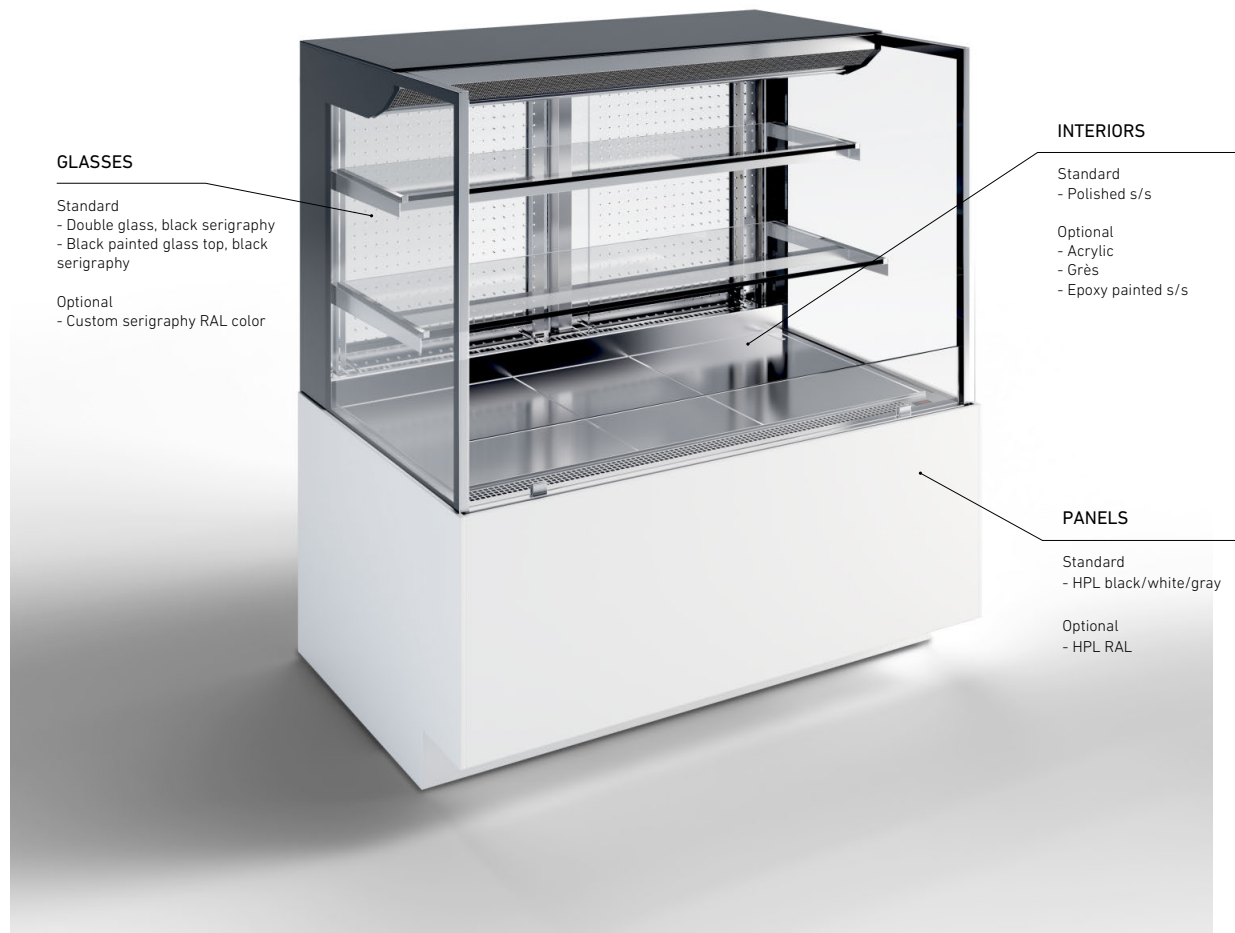


Ventilated Refrigeration Self-Service Showcase

Double-glazed sides | "black" silkscreen printing | polished aluminum profiles | nr. 2 intermediate shelves with lighting adjustable on low-voltage electrified rack system | operator-side closing with "Zero" type hinged door flush with the structure and integrated PETG perforated screens without central upright | tank insulated with ecological polyurethane and covered in stainless steel | electronic control unit and digital temperature reader flush with the surface | display tray and perimeter shelf in polished steel | refrigeration with fan ventilated refrigeration system on all display levels | programmed automatic defrosting | built-in hermetic condensing unit | supporting frame in galvanized steel with height adjustable stainless steel feet

 +39.2°F / +42.8°F



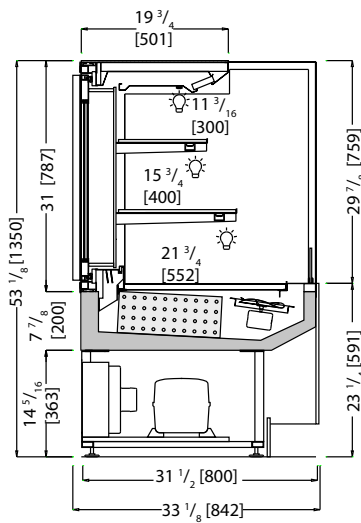

Technical




	Ventilated		Automatic
	R452A		N. 3 / RH 60% max 75 °F
	Hermetic		220 V / 1 Ph / 60 Hz
	Led no-spot 3000°K		+39.2/+42.8°F

Data Sheet


*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation *Crate weight only

	Model Code	Dimensions L x D x H Inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/H	Cooling Power/Expansion BTU / °F	GAS Type
	TRT3P8SS100I	39 3/8 x 33 1/8 x 53 1/8 46 7/16 x 40 1/4 x 63 3/4	485 220	1450 / 7.5	1.0	6483 / 14	R452A
	TRT3P8SS150I	59 1/16 x 33 1/8 x 53 1/8 66 1/8 x 40 1/4 x 63 3/4	750 309	1600 / 8.5	1.2	8189 / 14	R452A
	TRT3P8SS200I	78 3/4 x 33 1/8 x 53 1/8 85 13/16 x 40 1/4 x 63 3/4	992 397	1900 / 10.0	1.4	9554 / 14	R452A


Optionals:




SERIG01
Serigraphy
RAL color



BRDTR01-02
Inox profiles



CIVF117
Perimetral top for
drop-in config.



CIT16
Condensation
water pan



CIM08
Kit wheels